


distinction

Stand out from the crowd with one of our premium ranges


heavy contract

18 colourways




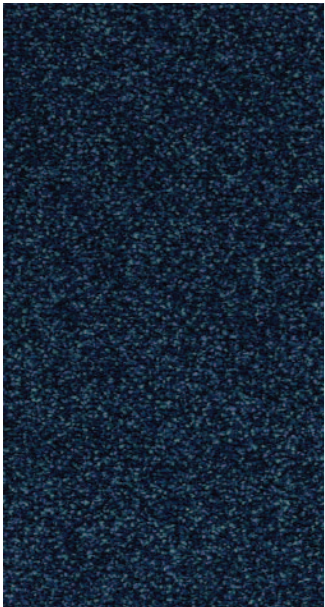


Distinction Bellagio

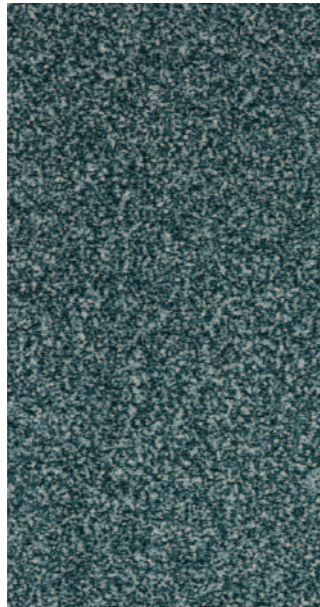

Distinction Blarney

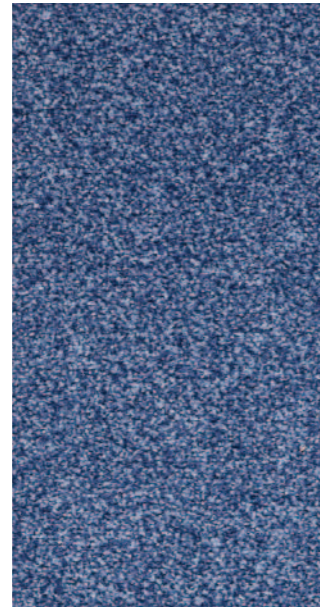

Distinction Everest

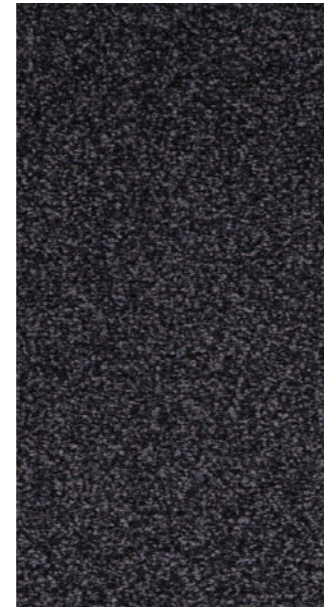


Distinction Fuji




Distinction Grand Canyon



Distinction Great Wall

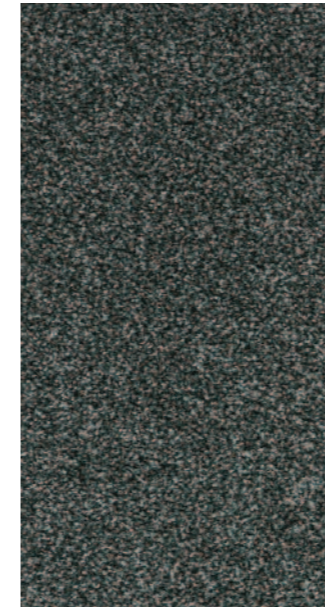


Distinction Lake District

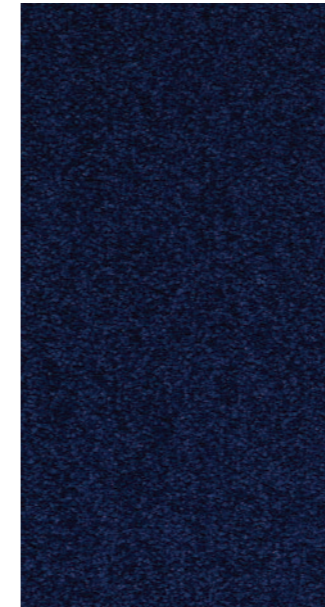


Distinction Lochness




Distinction Mount Sinai

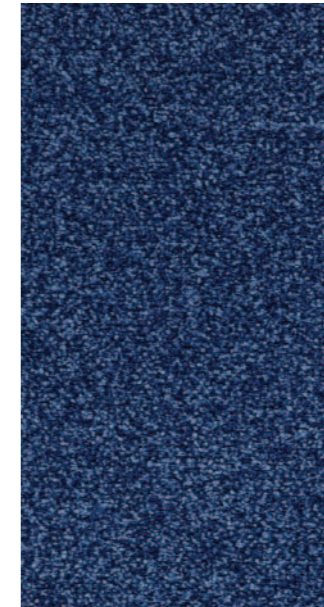

Distinction Niagara

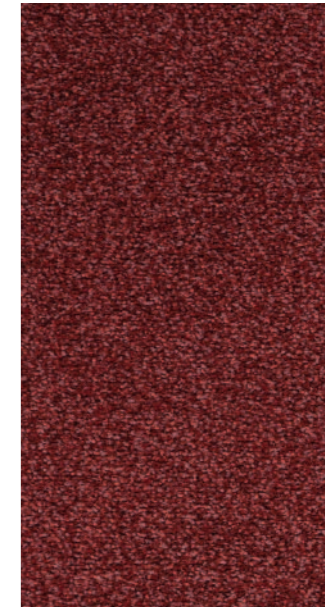


Distinction Pisa

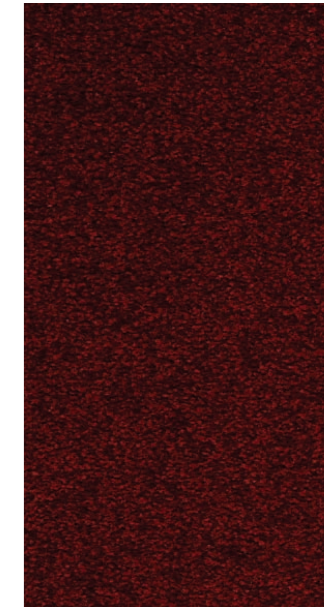


Distinction Red Square




Distinction Rhine Valley

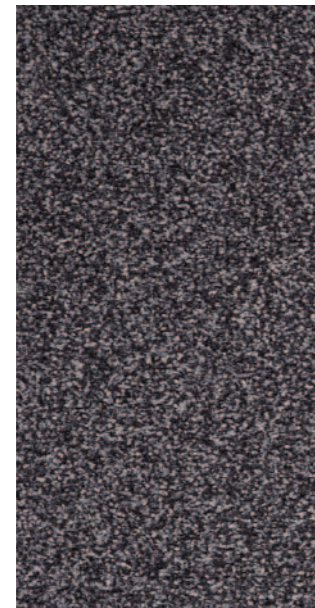


Distinction Stonehenge

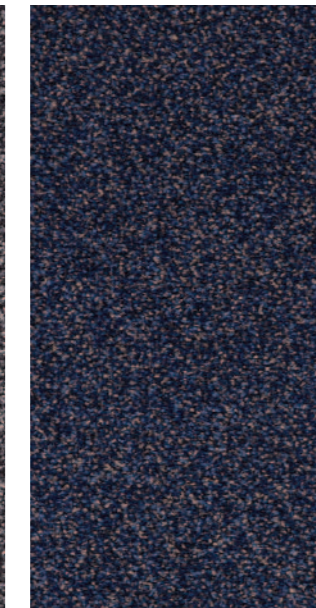


Distinction Tate Blue

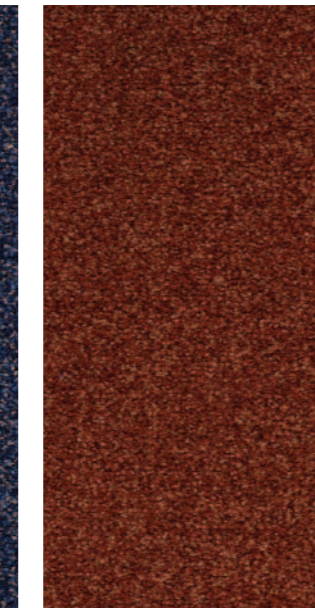

Distinction Tiger Gorge

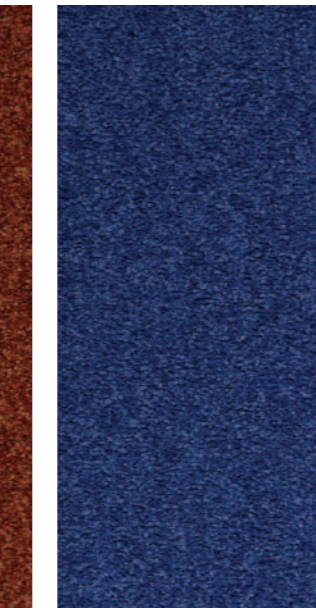

Distinction Versailles Blue

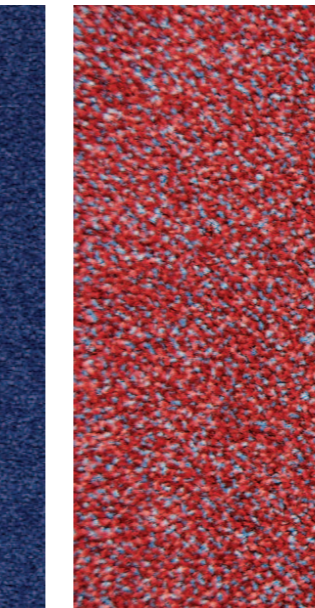

Distinction Assisi

Heavy Contract

10 Year Warranty

100% Nylon

Suitable for office and commercial areas

Up to 55% recycled content in the bitumen backing

S **Style**
1/10" guage Tufted Cut Pile Frise

Y **Yarn Construction**
100% Nylon

P **Pile Yarn Weight**
1080 g/m2

H **Pile Height**
5.5mm

T **Total Weight**
4750 g/m2

H **Total Height**
8mm

B **Backing**
Bitumen Backed

D **Dimensions**
50cm x 50cm

W **Wear Classification**
Heavy Contract

A **Anti-static**
< 2KV

C **Colour Fastness**
To Light (BS EN ISO105-B02) > 5
To Water (BS EN ISO105-E01) 4 - 5
To Rubbing (BS EN ISO105-X12) 4 - 5

F **Flammability**
Flooring radiant panel ASTM E648/DIN 4102 Class bfl-s1
Pill Test ISO 6925/ASTM D2829 Pass
Hot Metal Nut Test BS 4790/BS 5287 Low radius of ignition
UK Radiant Panel Test BS 476 (7) Class 3

C **Castor Chair Test**
DIN 54324

10 **Warranty**
10 Years

INSTALLATION

Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use F Ball tackifier F41 or Laybond 79. Tiles may be laid tessellated or broadloom. Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use. Further installation information is available from the Paragon Sales Office.


COLOUR

For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

MAINTENANCE

It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately. For detailed information, please consult the Paragon cleaning and maintenance guide. It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of barrier matting such as MatWorks, also available from Paragon.





paragon

Farfield Park
Manvers
Wath-upon-Dearne
Rotherham, S63 5DB.

T. +44 (0) 1709 763 839
F. +44 (0) 1709 763 813
E. sales@paragon-carpets.co.uk
W. www.paragon-carpets.co.uk