

# workspace linear

Make the most of any workspace with our premier linear design

heavy contract

15 colourways






5004 - Apollo Blue



3008 - Bond St Brown

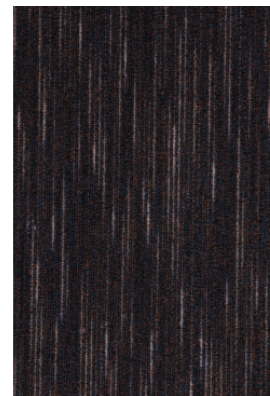

5009 - Metro Blue



3001 - Millennium Blue



7002 - Nobu Grey




7005 - Savoy Ochre




7008 - West End Fawn




7017 - Alber Green

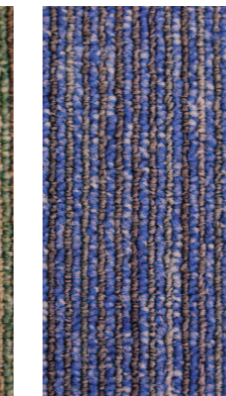


3012 - Broadway

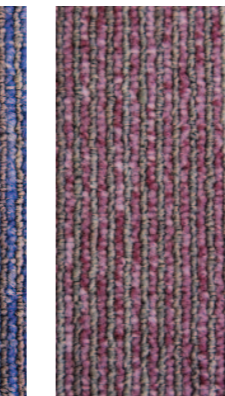


3016 - Westow Park Plum

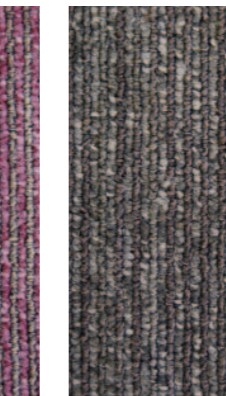


3013 - Docklands Grey

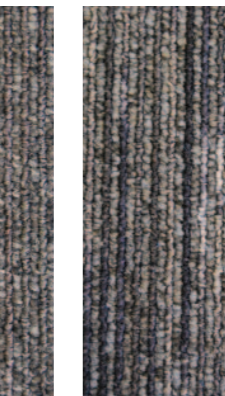


5014 - Islington tunnel

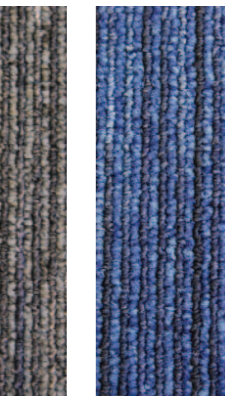

4018 - Regents Canal

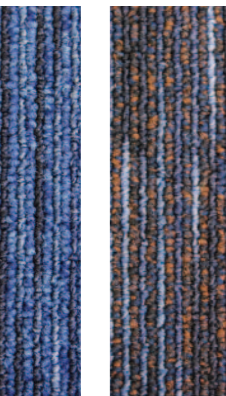

4009 - Clockhouse Blue

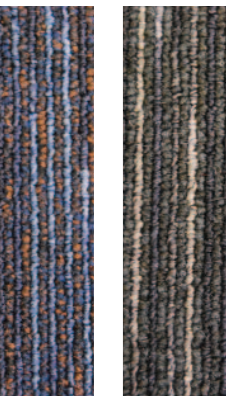

5181 - Victoria Blue



Suitable for office, commercial, retail, schools, colleges, and leisure















Heavy Contract

10 year warranty

Available in 15 linear designed colourways

600 gsm Pile Yarn Weight


Up to 55% recycled content in the bitumen backing


-  **Style**  
Tufted Loop Pile Tile 1/10" gauge
-  **Yarn Construction**  
Solution Dyed Nylon/ Space Dyed Nylon
-  **Pile Yarn Weight**  
600 gsm
-  **Pile Height**  
3mm
-  **Total Weight**  
4380 gsm
-  **Total Thickness**  
6mm
-  **Backing**  
Bitumen Backed
-  **Dimensions**  
50cm x 50cm
-  **Wear Classification**  
Heavy Contract
-  **Anti-static**  
< 2Kv body voltage  
Suitable for use with computers
-  **Colour Fastness**  
To Light BS EN (ISO105 – B02) 6  
To Water BS EN (ISO105 – E01) 4 - 5  
To Rubbing BS EN (ISO 105-X12) 4 - 5
-  **Flammability**  
Euroclass (BS EN ISO 9239-1)  
(BS EN ISO 11925-2) Bfl - s1  
**Flammability (BS 4790)** Low radius of Char
-  **Castor Chair Test** > 2.9 Suitable for continuous use  
BS EN 985 /
-  **Warranty**  
10 Years

**INSTALLATION**  
Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use F Ball tackifier F41 or Laybond 79. Tiles may be laid tessellated or broadloom. Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use. Further installation information is available from the Paragon Sales Office.

**COLOUR**  
For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

**MAINTENANCE**  
It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately. For detailed information, please consult the Paragon cleaning and maintenance guide. It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of barrier matting such as Mat.Works, also available from Paragon.

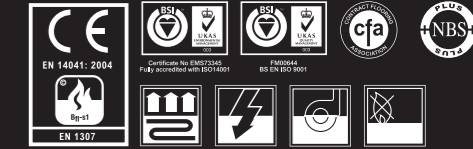



paragon

Farfield Park  
Manvers  
Wath-upon-Dearne  
Rotherham, S63 5DB.

T. +44 (0) 1709 763 839  
F. +44 (0) 1709 763 813  
E. [sales@paragon-carpets.co.uk](mailto:sales@paragon-carpets.co.uk)  
W. [www.paragon-carpets.co.uk](http://www.paragon-carpets.co.uk)