





Solid performance and reliability as standard

sirocco stripe



Liquorice  
(LRV - L22.91 Y3.79)



Humbug  
(LRV - L42.12 Y12.76)



Bubblegum  
(LRV - L28.45 Y5.66)



Blue Candy  
(LRV - L32.24 Y7.23)



Spearmint  
(LRV - L37.61 Y9.89)

contract rated  
5 colourways

# sirocco stripe

A balanced range of modern, contract rated colours for any application



**Style**  
Tufted Loop Pile Tile 1/10" guage



**Yarn Construction**  
100% Solution Dyed Polypropylene



**Pile Yarn Weight**  
580 gsm



**Pile Height**  
3.5mm



**Total Weight**  
4360 gsm



**Total Thickness**  
6.5mm



**Backing**  
Bitumen



**Dimensions**  
50cm x 50cm



**Wear Classification**  
Contract Rated



**Anti-static**  
<2Kv body voltage. Suitable for use with computers



**Static Load to BS 4939**  
Not less than 80% recovery after 24 hours



**Colour Fastness**  
To Light (BS EN ISO105-B02) Better than 6  
To Shampoo BS 1006 - UK - TB Change in shade 4 - 5  
To Rubbing (BS EN ISO105-X12) Wet 4 - 5, Dry 4 - 5



**Flammability**  
Floorcoverings tested to BS4790 Low Radius of Char (Hot Metal Nut Test)



Euroclass Flammability (BS EN ISO 9239) Bfl-s1 (BS EN ISO 11925-2)



**Castor Chair Test**  
Suitable for use with castor chairs



**Warranty**  
10 Years

**VOC Content**

E1 in relation to EN 14041:2004

Suitable for all Commercial and Education Markets

Contract Rated

10 year Warranty

Available in 5 colourways

580 gsm  
Pile Yarn Weight

Up to 50% recycled content in the bitumen backing


**INSTALLATION** - Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use F Ball tackifier F41 or Laybond 79. Sirocco Stripe tiles may only be laid tessellated. Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use. Always use seam sealer if an impermeable finish is required. Further installation information is available from the Paragon Sales Office.

**CLOUR** - For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

**MAINTENANCE** - It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately. For detailed information, please consult the Paragon cleaning and maintenance guide. It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of barrier matting such as MatWorks, also available from Paragon.




paragon  
CARPET TILES

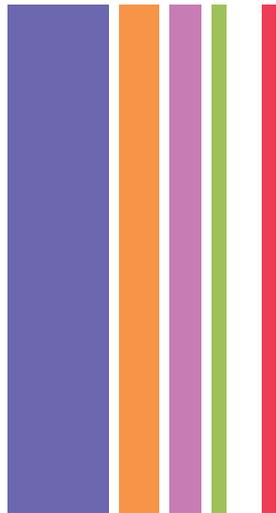

Farfield Park  
Manvers  
Wath-upon-Dearne  
Rotherham, S63 5DB.

T. +44 (0) 1709 763 839  
F. +44 (0) 1709 763 813  
E. [sales@paragon-carpets.co.uk](mailto:sales@paragon-carpets.co.uk)  
W. [www.paragon-carpets.co.uk](http://www.paragon-carpets.co.uk)



Download  
our free  
app **NOW**