


EXPERIENCE CARPET TILES

paragón
CARPET TILES



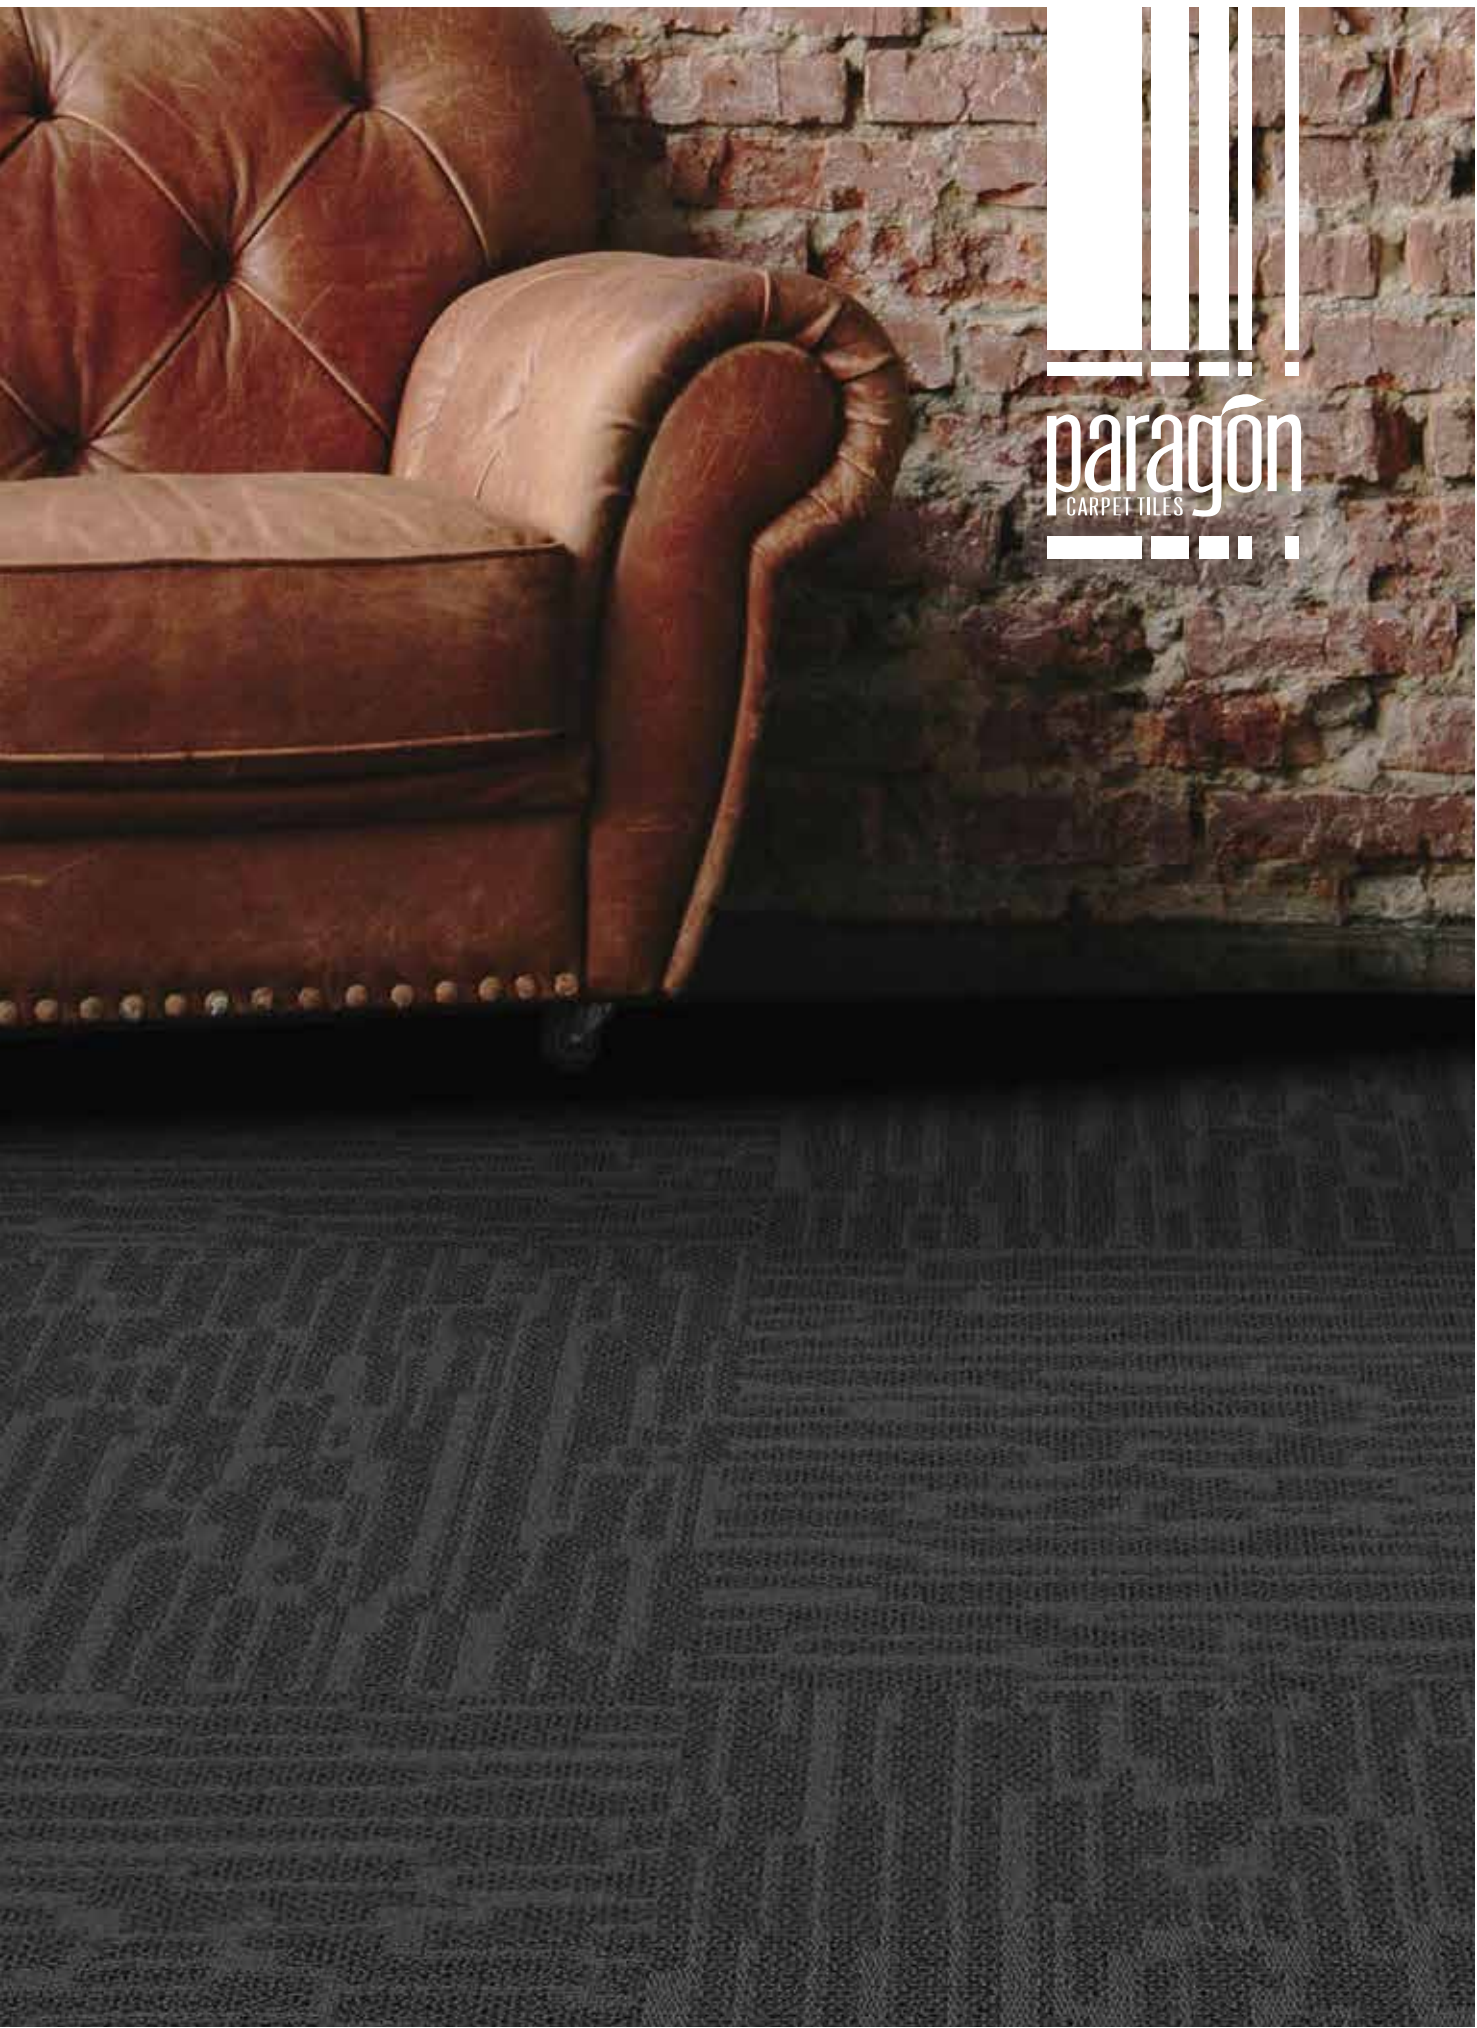

CONTENTS

DESIGN LOOP

Inspiration Collection - Cresta	6
Inspiration Collection - Mesh	10
Inspiration Collection - Greda	14
Inspiration Collection - Phase	18
Vapour	22
Total Contrast	26
Strobe	28
Workspace Linear	30
Codec	32
Highlights	34

LOOP PILE

Workspace Loop	38
Diversity and Diversity Groove	40
Vital	44
Toccarre	46
Sirocco and Sirocco Stripe	48
Macaw and Macaw Stripe	52

CUT PILE

Maestro	58
Workspace Cut Pile	60

LUXURY COMMERCIAL VINYL

Rappórt	64
Duera	66

ENTRANCE MATTING

PRIMARY:	
Frameworks	70
Treadloc 25	72
Entrack 50	74
SECONDARY:	
Workspace Entrance	76
Workspace Entrance Design	78

EXPLORE PARAGON CARPET TILES

National Floorcoverings	82
Environment and Manufacturing	84
Cleaning and Maintenance Guide	90
Contact Details	92




DESIGN LOOP

Inspiration Collection - Cresta	6
Inspiration Collection - Mesh	10
Inspiration Collection - Greda	14
Inspiration Collection - Phase	18
Vapour	22
Total Contrast	26
Strobe	28
Workspace Linear	30
Codec	32
Highlights	34



INSPIRATION COLLECTION CRESTA

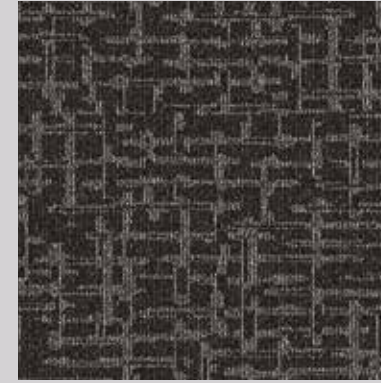


Castle Black, 9778N
(LRV - 1.91)




Silver Wolf, 8779N
(LRV - 3.94)



Bear Silver, 9749N
(LRV - 4.15)



Polar Trek, 1790N
(LRV - 18.94)




Lucent Grey, 1746N
(LRV - 7.63)




Glam Cyan, 6755N
(LRV - 3.60)

Style	Tufted 1/12" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	750gsm
Pile Height	3mm - 5mm
Total Weight	4450gsm
Total Thickness	7mm ± 0.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >5 Shampoo (BS 1006:UK-TB:1990) >4 Dry Rubbing (BS EN ISO 105:B01) >4 Wet Rubbing (BS EN ISO 105:X12) >4
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004

TOTAL COLOURWAY OPTIONS - 6



BROADLOOM DESIGN



TESSELLATED DESIGN

AVAILABLE
FROM STOCK




MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.


INSPIRATION COLLECTION
CRESTA





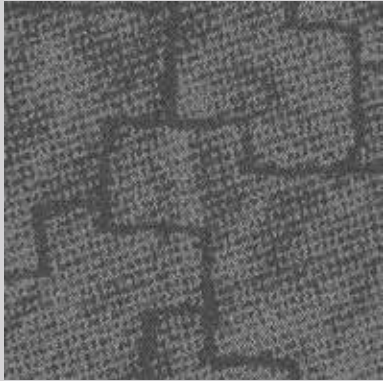



Obsidian Flash, 8775L
(LRV - 5.10)




Sonic Coal, 8773L
(LRV - 12.69)




Shadow Bone, 8778L
(LRV - 3.11)



Mild Sienna, 6755L
(LRV - 2.04)



Satin Ash, 9748L
(LRV - 4.20)



Burly Wood, 1745L
(LRV - 8.43)

Style	Tufted 1/12" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	750gsm
Pile Height	2.5mm - 5.5mm
Total Weight	4450gsm
Total Thickness	7mm ± 0.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >5 Shampoo (BS 1006:UK-TB:1990) >4 Dry Rubbing (BS EN ISO 105:B01) >4 Wet Rubbing (BS EN ISO 105:X12) >4
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for continuous use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004

↑

↑

↑

↑

↑

↑

↑

↑

↑

BROADLOOM DESIGN

↑

↑

↑

↑

↑

↑


↑

↑

↑

TESSELLATED DESIGN

AVAILABLE FROM STOCK



MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.

11

INSPIRATION COLLECTION
MESH






INSPIRATION COLLECTION


GREDA



Livid Grey, 8773V
(LRV - 10.40)



Ghost Machine, 8775V
(LRV - 4.19)



Electric Azure, 6755V
(LRV - 3.77)



Crackled Station, 1763V
(LRV - 12.20)




Lime Spring, 5761V
(LRV - 24.37)




Moccasin, 3730V
(LRV - 10.37)

Style	Tufted 1/12" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	750gsm
Pile Height	3mm - 6.5mm
Total Weight	4450gsm
Total Thickness	8mm ± 0.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >5 Shampoo (BS 1006:UK-TB:1990) >4 Dry Rubbing (BS EN ISO 105:B01) >4 Wet Rubbing (BS EN ISO 105:X12) >4
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004

TOTAL COLOURWAY OPTIONS - 6



BROADLOOM DESIGN



TESSELLATED DESIGN

AVAILABLE
FROM STOCK




MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.

INSPIRATION COLLECTION
GREDA




INSPIRATION COLLECTION PHASE

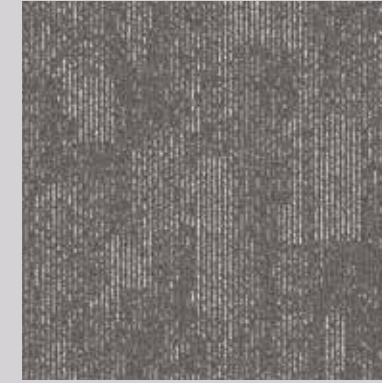

Gainsboro, 8675B
(LRV - 6.13)




Virtual Ebony, 8677B
(LRV - 2.87)




Charged Metal, 1648B
(LRV - 2.69)



Dodger Blue, 6657B
(LRV - 2.78)




Cloud Indigo, 6658B
(LRV - 5.07)




Navajo Brown, 3627B
(LRV - 3.24)

Style	Tufted 1/12" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	610gsm
Pile Height	2.5mm - 5.5mm
Total Weight	4310gsm
Total Thickness	7mm ± 0.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >5 Shampoo (BS 1006:UK-TB:1990) >4 Dry Rubbing (BS EN ISO 105:B01) >4 Wet Rubbing (BS EN ISO 105:X12) >4
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004

TOTAL COLOURWAY OPTIONS - 6



BROADLOOM DESIGN



TESSELLATED DESIGN


AVAILABLE
FROM STOCK



MADE IN BRITAIN


Tile colours representative in print, order a full tile for true likeness.

INSPIRATION COLLECTION
PHASE

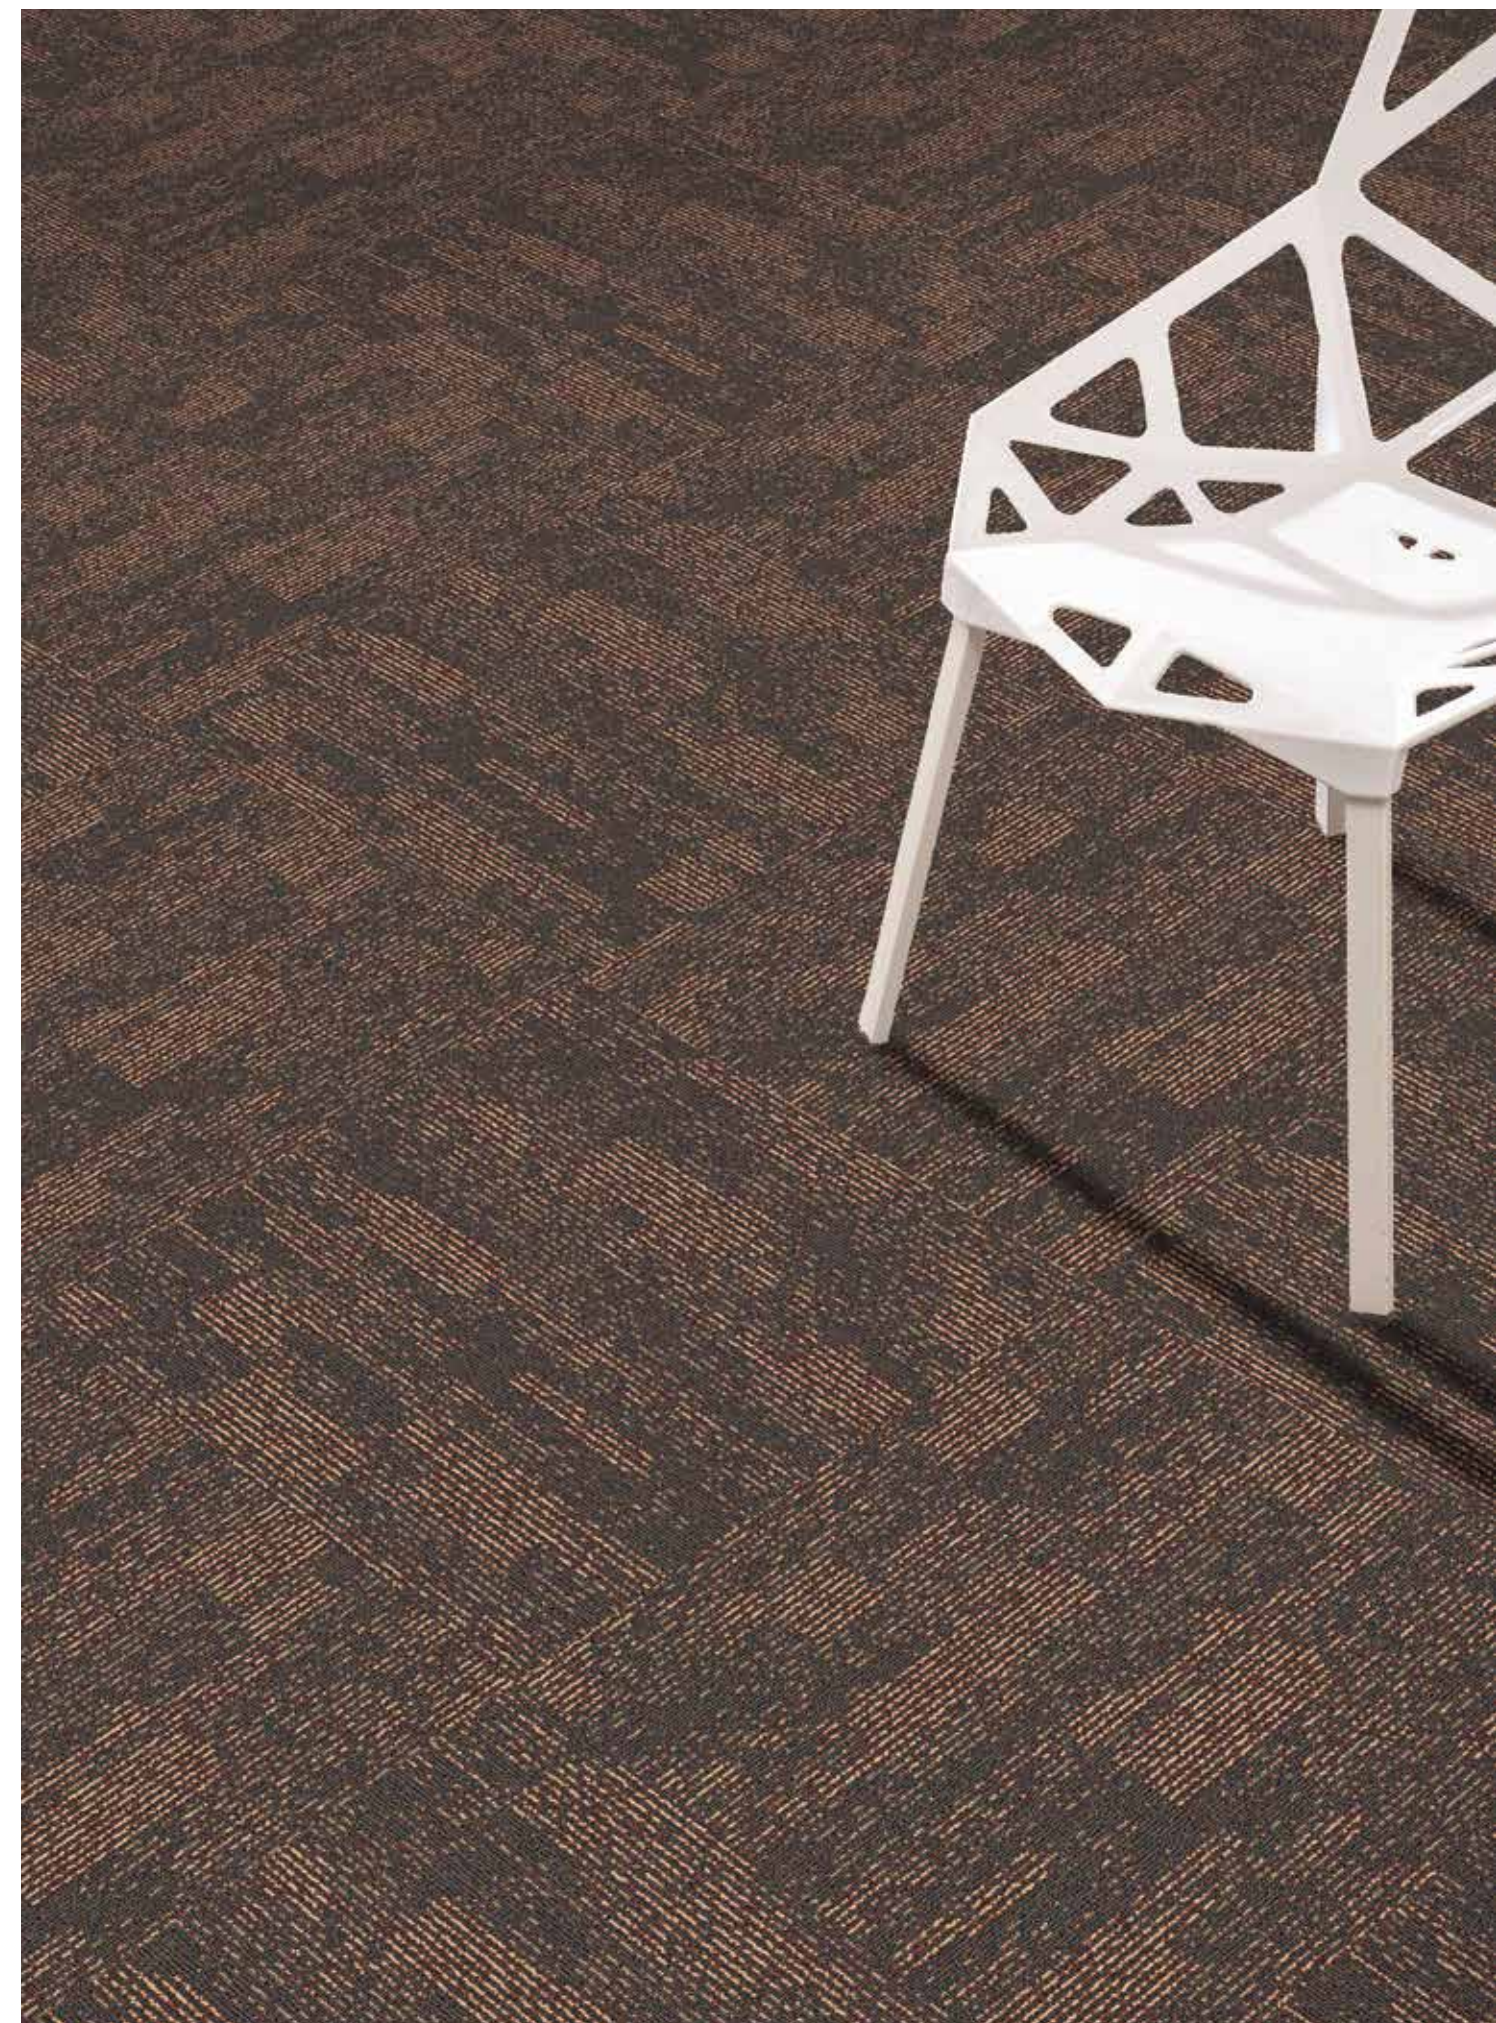





VAPOUR




Halo, 82145
(LRV - 4.93)




Steam, 84558
(LRV - 13.19)




Spray, 63845
(LRV - 6.18)




Mist, 63852
(LRV - 6.20)




Aura, 63243
(LRV - 4.06)




Spectre, 54584
(LRV - 9.65)



Fog, 28382
(LRV - 9.32)




Humidity, 74558
(LRV - 6.88)



Nebula, 34465
(LRV - 13.88)

Style	Tufted 1/12" Gauge Loop Pile Tile
Yarn Construction	Antron Lumena SD 6.6 NI
Pile Yarn Weight	650gsm
Pile Height	2.5mm ± 0.5mm
Total Weight	4140gsm
Total Thickness	6mm ± 0.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m²)
Wear Classification	Heavy Contract Class 33
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Cfl-s1
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated

TOTAL COLOURWAY OPTIONS - 9



RANDOM LAY DESIGN

AVAILABLE FROM STOCK

MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.

VAPOUR





TOTAL CONTRAST



Palladium Sky, 91826
(LRV - 3.74)



Chrome Pelt, 83126
(LRV - 8.51)




Ocean Rocks, 64518
(LRV - 3.01)



Black Leaf, 52926
(LRV - 11.81)



Cracked Sapling, 10001
(LRV - 14.99)



Mellow Bark, 10203
(LRV - 11.69)

Colourways show 1sqm for pattern effect


Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed ECONYL® manufactured from recycled fishing nets
Pile Yarn Weight	600gsm
Pile Height	3mm
Total Weight	4380gsm
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated



The ECONYL® Regeneration System recovers waste (fishing nets) which would otherwise end up in landfill or the ocean, causing serious damage to the ecosystem. The unique process that allows Aquafil to produce 100% regenerated Nylon yarn using waste material instead of fossil raw material.

Compared to common Nylon 6, ECONYL® fiber reduces approximately 50% of the CO2 equivalent emissions per kg of yarn, providing real savings in terms of emissions.

TOTAL COLOURWAY OPTIONS - 6



RANDOM LAY DESIGN

AVAILABLE
FROM STOCK




MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.




STROBE

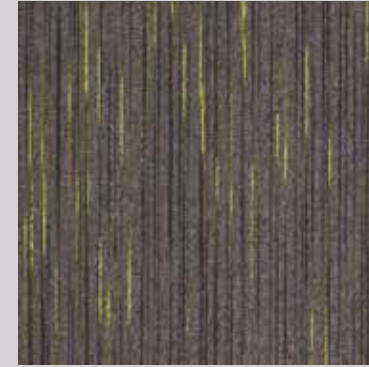

Flex, 2620
(LRV - 4.97)



Blaze, 2604
(LRV - 4.24)



Ignite, 2603
(LRV - 6.09)



Extreme, 2606
(LRV - 5.11)



Spark, 2621
(LRV - 4.57)




Vivid, 4504
(LRV - 4.38)



Rapid, 2614
(LRV - 5.53)



Breeze, 4109
(LRV - 6.04)



Force, 2605
(LRV - 7.47)




Plasma, 2619
(LRV - 4.39)




Grey Fusion Highlight, 8226
(LRV - 4.69)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed / Space Dyed Nylon
Pile Yarn Weight	610gsm
Pile Height	3mm
Total Weight	4400gsm
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for continuous use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated

TOTAL COLOURWAY OPTIONS - 10+1



BROADLOOM DESIGN



TESSELLATED DESIGN

AVAILABLE
FROM STOCK



MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.



WORKSPACE LINEAR



Islington Tunnel, 5014
(LRV - 5.54)



Nobu Grey, 7002
(LRV - 15.67)



Apollo Blue, 5004
(LRV - 4.42)



Regents Canal, 4018
(LRV - 5.12)



Clockhouse Blue, 4009
(LRV - 3.72)



Broadway, 3012
(LRV - 8.17)



Savoy Ochre, 7005
(LRV - 15.80)



Alber Green, 7017
(LRV - 13.09)



Docklands Grey, 3013
(LRV - 9.01)




Millennium Blue, 3001
(LRV - 8.18)



Victoria Blue, 5181
(LRV - 2.92)



Metro Blue, 5009
(LRV - 3.50)



Beauchamp Brown, 3193
(LRV - 6.53)




West End Fawn, 7008
(LRV - 10.09)




Westow Park Plum, 3016
(LRV - 7.50)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed / Space Dyed Nylon
Pile Yarn Weight	600gsm
Pile Height	3mm
Total Weight	4380gsm
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated

TOTAL COLOURWAY OPTIONS - 15



BROADLOOM DESIGN



TESSELLATED DESIGN

AVAILABLE
FROM STOCK



MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.





Axis, 8181
(LRV - 4.00)



Axis Accent, 8228
(LRV - 5.78)



Binary, 9191
(LRV - 9.59)



Binary Accent, 9183
(LRV - 17.50)



Index, 2181
(LRV - 4.60)



Index Accent, 2247
(LRV - 7.73)



Hex, 7181
(LRV - 4.77)



Hex Accent, 7248
(LRV - 7.22)



Digital, 6181
(LRV - 4.32)



Digital Accent, 6176
(LRV - 4.62)



Pathway, 5151
(LRV - 11.59)



Pathway Accent, 5229
(LRV - 21.82)

Style Tufted 1/10" Gauge Loop Pile Tile

Yarn Construction 100% Solution Dyed Nylon

Pile Yarn Weight 600gsm

Pile Height 3mm

Total Weight 4380gsm

Total Thickness 6mm

Backing 100% Envirobase - minimum of 75% recycled material

Additional Backing Komfort Bac available on request

Tile Size 50cm x 50cm

Tiles Per Box 20 (5m²)

Wear Classification Heavy Contract Class 33

Luxury Class LC1

Anti-static Suitable for use with computers. Less than 2Kv

Colour Fastness Light (BS EN ISO 105:B02) >5
Shampoo (BS 1006:UK-TB:1990) 4-5
Dry Rubbing (BS EN ISO 105:B01) 4-5
Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char

BS EN 13501 Class Bfl-s1

Castor Chair Test Suitable for intensive use with castor chairs

Warranty 10 years

VOC Content E1 in relation to EN 14041:2004

Environmental Status BREEAM® A Rated

TOTAL COLOURWAY OPTIONS - 12



BROADLOOM DESIGN



TESSELLATED DESIGN

AVAILABLE FROM STOCK



MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.



Highlights 3, Multi-Level



Highlights 3, Multi-Level |
Amber, 42413
(LRV - 22)



Highlights 3, Multi-Level |
Yellow, 42403
(LRV - 44)



Highlights 3, Multi-Level |
Green, 56693
(LRV - 13)



Highlights 3, Multi-Level |
Vermillion Red, 23813
(LRV - 8)



Highlights 3, Multi-Level |
Aquamarine, 56493
(LRV - 12)



Highlights 3, Multi-Level |
Navy, 65123
(LRV - 3)



Highlights 3, Multi-Level |
Orange, 33753
(LRV - 17)



Highlights 3, Multi-Level |
Crimson, 23953
(LRV - 4)



Highlights 3, Multi-Level |
Violet, 74823
(LRV - 5)



Highlights 3, Multi-Level |
Purple, 74313
(LRV - 6)



Highlights 3, Multi-Level |
Blue, 65803
(LRV - 5)



Highlights 3, Multi-Level |
Pink, 23173
(LRV - 8)




Highlights 5, Strobe



Highlights 5, Strobe |
Flex, 2620
(LRV - 4.97)



Highlights 5, Strobe |
Blaze, 2604
(LRV - 4.24)



Highlights 5, Strobe |
Ignite, 2603
(LRV - 6.09)



Highlights 5, Strobe |
Extreme, 2606
(LRV - 5.11)



Highlights 5, Strobe |
Spark, 2621
(LRV - 4.57)



Highlights 5, Strobe |
Vivid, 4504
(LRV - 4.38)



Highlights 5, Strobe |
Rapid, 2614
(LRV - 5.53)



Highlights 5, Strobe |
Breeze, 4109
(LRV - 6.04)



Highlights 5, Strobe |
Force, 2605
(LRV - 7.47)



Highlights 5, Strobe |
Plasma, 2619
(LRV - 4.39)



Highlights 5, Strobe | Grey Fusion Highlight, 8226
(LRV - 4.69)




MADE IN BRITAIN

HIGHLIGHTS 3, MULTI-LEVEL

Style	Tufted 1/12" Gauge Loop Pile Tile
Yarn Construction	100% PA 6 Aqualon™
Pile Yarn Weight	870gsm
Pile Height	4mm
Total Weight	4800gsm
Total Thickness	7.7mm
Backing	100% Envirobace - minimum of 75% recycled material
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m²)
Wear Classification	Heavy Contract Class 33
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) 5 Wet Rubbing (BS EN ISO 105:X12) 4
Flammability BS EN 13501	Bfl-s1
Castor Chair Test	Suitable for use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004


HIGHLIGHTS 5, STROBE

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed / Space Dyed Nylon
Pile Yarn Weight	610gsm
Pile Height	3mm
Total Weight	4400gsm
Total Thickness	6mm
Backing	100% Envirobace - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated

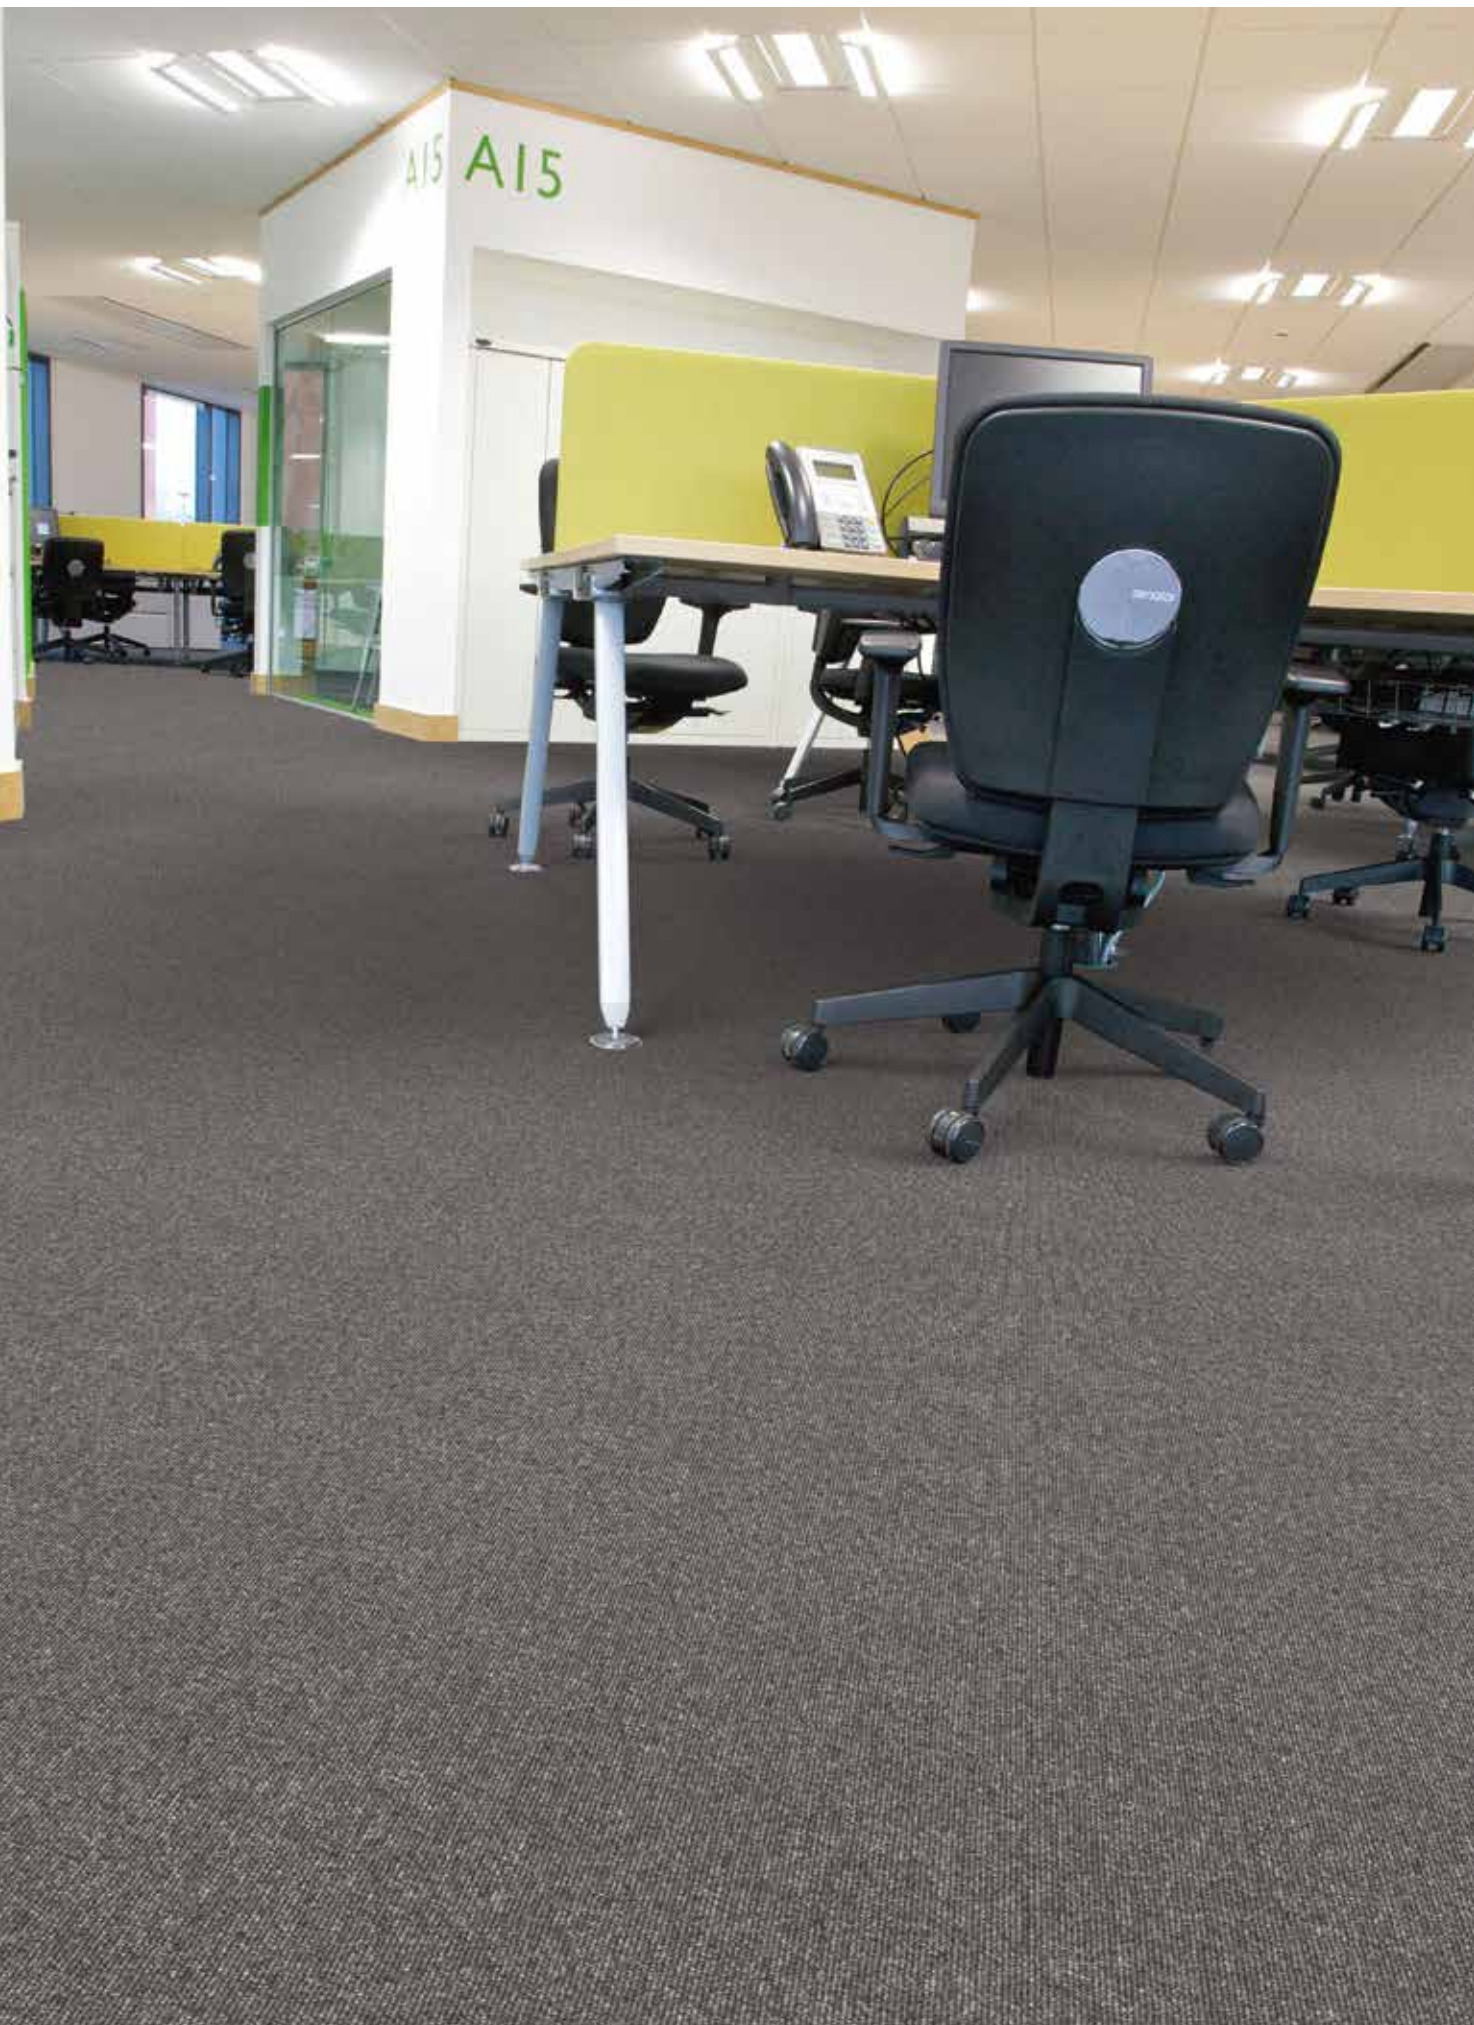

LOOP PILE

Workspace Loop	38
Diversity and Diversity Groove	40
Vital	44
Toccarre	46
Sirocco and Sirocco Stripe	48
Macaw and Macaw Stripe	52

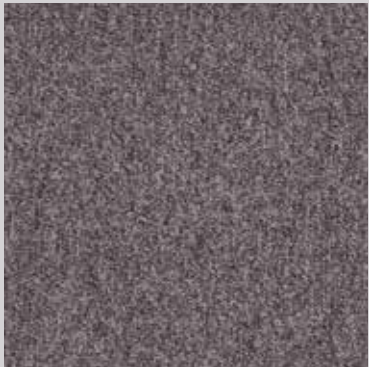

Silver, 8031
(LRV - 13.24)



Platinum, 9235
(LRV - 8.62)



Charcoal, 8050
(LRV - 6.36)



Moorland, 8052
(LRV - 10.05)



Blue Moon, 6123
(LRV - 7.68)



Midnight, 6159
(LRV - 4.17)



Blue Yonder, 6245
(LRV - 3.68)



Magenta Rock, 7246
(LRV - 4.42)




Rose, 2152
(LRV - 6.36)




Sepia, 1160
(LRV - 7.20)



Apple, 6229
(LRV - 21.82)




Graphite, 8025
(LRV - 5.51)



Onyx, 8181
(LRV - 2.47)



Kingfisher, 5329
(LRV - 10.12)



Indigo, 6049
(LRV - 4.37)



Blueberry, 6155
(LRV - 8.61)



Lavender, 7035
(LRV - 8.20)



Ruby, 2182
(LRV - 5.35)




Sandstone, 1015
(LRV - 17.28)




Pampas, 5157
(LRV - 10.13)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	580gsm
Pile Height	3mm
Total Weight	4360gsm
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated

TOTAL COLOURWAY OPTIONS - 20



BROADLOOM DESIGN



TESSELLATED DESIGN

AVAILABLE
FROM STOCK




MADE IN BRITAIN


Tile colours representative in print, order a full tile for true likeness.



DIVERSITY

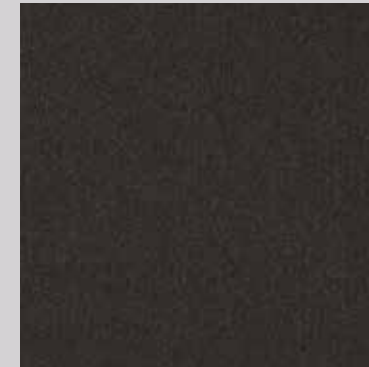

Panther, 812
(LRV - 2.94)



Foundry Grey, 810
(LRV - 6.63)



London Stone, 820
(LRV - 10.04)



Liberty, 612
(LRV - 3.13)




Electric, 625
(LRV - 5.12)



Racing Green, 505
(LRV - 4.89)



Razzmic Berry, 740
(LRV - 6.07)



Blazer, 210
(LRV - 4.52)



Lupus Grey, 811
(LRV - 5.32)



Mouse, 830
(LRV - 16.28)



Denim, 616
(LRV - 4.95)



Skylight, 640
(LRV - 7.65)



Grasshopper, 550
(LRV - 14.41)



Purple Rain, 750
(LRV - 4.26)



Bark, 108
(LRV - 9.82)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	500gsm
Pile Height	3mm
Total Weight	4280gsm
Total Thickness	5.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated

TOTAL COLOURWAY OPTIONS - 15

AVAILABLE FROM STOCK

MADE IN BRITAIN

BROADLOOM DESIGN TESSELLATED DESIGN

Tile colours representative in print, order a full tile for true likeness.




DIVERSITY GROOVE



Vibe, 810820
(LRV - 8.04)



Asha, 812810
(LRV - 4.39)



Armada, 812820
(LRV - 5.31)




Jaxx, 616810
(LRV - 5.74)




Gusto, 616812
(LRV - 3.57)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	500gsm
Pile Height	3mm
Total Weight	4280gsm
Total Thickness	5.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated
Diversity Groove is a random lay product	


TOTAL COLOURWAY OPTIONS - 5



BROADLOOM DESIGN



TESSELLATED DESIGN



RANDOM LAY DESIGN


AVAILABLE
FROM STOCK



MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.





Titanium, 8001
(LRV - 7.11)



Tungsten, 8316
(LRV - 5.09)




Carbon, 8007
(LRV - 2.54)




Granite, 8302
(LRV - 9.86)




Glacier, 6013
(LRV - 6.90)




Marine, 6310
(LRV - 6.30)




Sea Blue, 6011
(LRV - 5.49)




Argon, 2315
(LRV - 6.01)




Mercury, 878316
(LRV - 3.91)




Nickel, 868302
(LRV - 7.54)




Zinc, 878302
(LRV - 6.91)



Ice, 876013
(LRV - 4.85)



Arctic, 876310
(LRV - 4.26)



Xenon, 872315
(LRV - 4.00)

Style

Yarn Construction

Pile Yarn Weight

Pile Height

Total Weight

Total Thickness

Backing

Additional Backing

Tile Size

Tiles Per Box

Wear Classification

Luxury Class

Anti-static

Colour Fastness

Flammability

BS EN 13501

Castor Chair Test

Warranty

VOC Content

Environmental Status

Tufted 1/10" Gauge Loop Pile Tile

100% Solution Dyed Nylon

450gsm

3mm

4030gsm

5.5mm

100% Envirobase - minimum of 75% recycled material

Komfort Bac available on request

50cm x 50cm

20 (5m²)

Heavy Contract Class 33

LC1

Suitable for use with computers. Less than 2Kv

Light (BS EN ISO 105:B02) >6

Shampoo (BS 1006:UK-TB:1990) 4-5

Dry Rubbing (BS EN ISO 105:B01) 4-5

Wet Rubbing (BS EN ISO 105:X12) 4-5

BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char

Class Bfl-s1


Suitable for intensive use with castor chairs

10 years


E1 in relation to EN 14041:2004

BREEAM® A Rated

TOTAL COLOURWAY OPTIONS - 14




BROADLOOM DESIGN



TESSELLATED DESIGN

AVAILABLE FROM STOCK




MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.

45



TOCCARRE

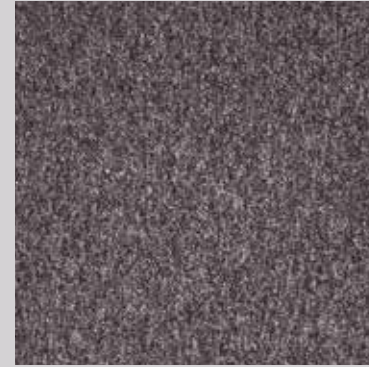

Termini, 8554
(LRV - 8.96)



Grigia, 9559
(LRV - 16.22)




Tutto, 6569
(LRV - 2.19)



Moderno, 6553
(LRV - 4.98)



Azzurra, 6339
(LRV - 7.75)



Blu, 6558
(LRV - 8.91)



Fresco, 1652
(LRV - 7.85)



Marrone, 1656
(LRV - 8.88)



Montagna, 1545
(LRV - 13.25)



Menta, 5560
(LRV - 6.34)




La Mela, 5550
(LRV - 8.36)




Desmo, 2640
(LRV - 4.52)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Polypropylene
Pile Yarn Weight	630gsm
Pile Height	3mm
Total Weight	4420gsm
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Cfl-s1
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated

TOTAL COLOURWAY OPTIONS - 12



BROADLOOM DESIGN



TESSELLATED DESIGN


AVAILABLE
FROM STOCK




MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.







Jet, 821
(LRV - 2.78)




Quartz, 101
(LRV - 5.15)




Sapphire, 501
(LRV - 4.95)




Topaz, 458
(LRV - 8.50)




Paprika, 459
(LRV - 6.71)




Lime, 318
(LRV - 15.29)




Pewter, 171
(LRV - 15.55)



Blue John, 896
(LRV - 5.78)




Tempest, 277
(LRV - 3.22)




Tanzanite, 743
(LRV - 4.84)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Polypropylene
Pile Yarn Weight	580gsm
Pile Height	3.5mm
Total Weight	4360gsm
Total Thickness	6.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004

TOTAL COLOURWAY OPTIONS - 10




BROADLOOM DESIGN



TESSELLATED DESIGN

AVAILABLE FROM STOCK




MADE IN BRITAIN


Tile colours representative in print, order a full tile for true likeness.

49



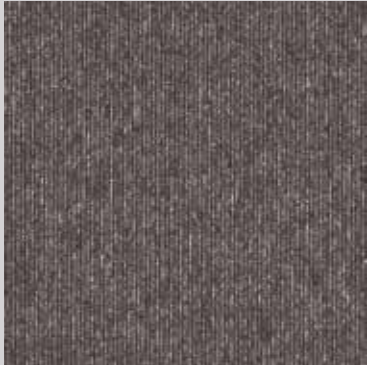



Liquorice, 821101
(LRV - 3.79)




Humbug, 101171
(LRV - 12.76)



Bubblegum, 821458
(LRV - 5.66)



Blue Candy, 501458
(LRV - 7.23)



Spearmint, 318101
(LRV - 9.89)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Polypropylene
Pile Yarn Weight	580gsm
Pile Height	3.5mm
Total Weight	4360gsm
Total Thickness	6.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004



TESSELLATED DESIGN


AVAILABLE FROM STOCK




MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.







Jet, 821
(LRV - 2.68)




Quartz, 101
(LRV - 5.94)




Pewter, 171
(LRV - 15.29)



Sapphire, 501
(LRV - 5.02)




Aegean, 831
(LRV - 8.17)




Paprika, 459
(LRV - 6.24)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Polypropylene
Pile Yarn Weight	420gsm
Pile Height	3.5mm
Total Weight	4200gsm
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m²)
Wear Classification	General Contract
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Efl
VOC Content	E1 in relation to EN 14041:2004

TOTAL COLOURWAY OPTIONS - 6




BROADLOOM DESIGN



TESSELLATED DESIGN

AVAILABLE FROM STOCK




MADE IN BRITAIN


Tile colours representative in print, order a full tile for true likeness.




MACAW STRIPE




Jet / Quartz, 821101
(LRV - 3.82)



Quartz / Pewter, 101171
(LRV - 12.56)



Lime / Quartz, 318101
(LRV - 9.33)



Aegean / Sapphire, 831501
(LRV - 6.75)

Style Tufted 1/10" Gauge Loop Pile Tile

Yarn Construction 100% Solution Dyed Polypropylene

Pile Yarn Weight 420gsm

Pile Height 3.5mm

Total Weight 4200gsm

Total Thickness 6mm

Backing 100% Envirobase - minimum of 75% recycled material

Tile Size 50cm x 50cm

Tiles Per Box 20 (5m²)

Wear Classification General Contract

Luxury Class LC1


Anti-static Suitable for use with computers. Less than 2Kv

Colour Fastness Light (BS EN ISO 105:B02) >6
Shampoo (BS 1006:UK-TB:1990) 4-5
Dry Rubbing (BS EN ISO 105:B01) 4-5
Wet Rubbing (BS EN ISO 105:X12) 4-5

Flammability BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char


BS EN 13501 Class Efl

VOC Content E1 in relation to EN 14041:2004



TESSELLATED DESIGN

AVAILABLE FROM STOCK



MADE IN BRITAIN


Tile colours representative in print, order a full tile for true likeness.

55




CUT PILE

Maestro	58
Workspace Cut Pile	60



Charcoal, 903
(LRV - 3.05)



Twilight Cinders, 991
(LRV - 2.18)



Silver, 900
(LRV - 12.15)



Woodland Fern, 662
(LRV - 16.47)



Brooklyn Nights, 963
(LRV - 5.06)



Sapphire, 101
(LRV - 6.43)




Celestial Blue, 569
(LRV - 10.34)



Blue Diamond, 506
(LRV - 12.87)




Turquoise, 200
(LRV - 7.76)



Steel, 902
(LRV - 5.88)



Night Jewel, 994
(LRV - 12.55)



Deep Blue, 103
(LRV - 2.72)



Royal Regatta, 533
(LRV - 3.36)



Azure Fusion, 595
(LRV - 6.81)



Teal, 100
(LRV - 9.23)



Emerald Orchestra, 511
(LRV - 9.26)




Dark Green, 201
(LRV - 3.95)



Dublin Bay, 613
(LRV - 9.18)



Cocoa Blush, 830
(LRV - 5.94)



Dusty Pink, 800
(LRV - 5.97)



Sunflower Symphony, 827
(LRV - 12.76)



Beige, 600
(LRV - 17.94)




Bracken Salts, 817
(LRV - 19.35)



Nutshell, 386
(LRV - 22.44)



Auburn Falls, 322
(LRV - 16.83)



Volcanic Splash, 314
(LRV - 7.96)



Red, 501
(LRV - 5.50)



Indian Ivy, 601
(LRV - 18.47)



Sycamore, 700
(LRV - 6.22)



Delhi Bazaar, 463
(LRV - 6.85)



Velvet Truffle, 823
(LRV - 10.99)



Earth Glaze, 224
(LRV - 18.24)




Gold, 300
(LRV - 22.17)



Coral, 400
(LRV - 15.53)



Claret, 500
(LRV - 4.16)



Hot Paprika, 307
(LRV - 8.79)

Style	Tufted 1/10" Gauge Cut Pile Tile
Yarn Construction	100% Invista Nylon
Pile Yarn Weight	1050gsm
Pile Height	5mm
Total Weight	4650gsm
Total Thickness	8mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC2
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >5 Wet Rubbing (BS EN ISO 105:X12) >4
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004

TOTAL COLOURWAY OPTIONS - 36

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑

↑



WORKSPACE CUT PILE

Steel Grey, 8031C
(LRV - 11.62)

Iron Grey, 8025C
(LRV - 5.26)

Coastal Blue, 6159C
(LRV - 3.59)

Sky Blue, 6123C
(LRV - 7.34)

Biscay Blue, 6051C
(LRV - 3.35)

Nordic Green, 5011C
(LRV - 8.15)

Gecko Green, 5009C
(LRV - 9.72)

Grape Blue, 6155C
(LRV - 6.91)

Lilac, 7035C
(LRV - 6.59)

Salsa, 7040C
(LRV - 3.28)

Cayenne, 3038C
(LRV - 6.11)

Wheat, 1015C
(LRV - 16.70)

Style	Tufted 1/10" Gauge Cut Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	850gsm
Pile Height	5mm
Total Weight	4650gsm
Total Thickness	8.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC2
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004

TOTAL COLOURWAY OPTIONS - 12

BROADLOOM DESIGN

TESSELLATED DESIGN

AVAILABLE FROM STOCK

MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.



LUXURY COMMERCIAL VINYL

Rapport

64

Duara

66



RAPPÓRT

WOOD EFFECT



Grey Limed Oak, 2798



Lakeside Pine, 2889



Burnt Sienna Wood, 2893



Shadow Ash, 2894



French Grey Elm, 2895




Bowland Oak, 2896



Midsummer Oak, 2897



Orchard Oak, 2898



Kentucky Timberwood, 2899



Dockyard Oak, 2947



Chalet Oak, 2948

STONE EFFECT



Seasoned Concrete, 2969



Copper Metalstone, 2970



Dark Metalstone, 2979



Fresh Concrete, 2799




Ashen Concrete, 2796


Style	Luxury Commercial Vinyl
Material	Heterogenous PVC
Surface Treatment	PUR
Total Weight	4290gsm
Total Thickness	2.5mm
Wear Layer Thickness	0.55mm
Wood Effect Plank Size	18.42cm x 121.92cm
Stone Effect Plank Size	45.72cm x 91.44cm
Wood Effect Planks Per Box	15 (3.37m ²)
Stone Effect Planks Per Box	8 (3.34m ²)
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) ≥6
Flammability BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for use with castor chairs
Dimensional Stability	<0.1%
Residual Indentation	0.05mm
Underfloor Heating	Suitable, maximum 27°C




WOOD EFFECT




Twilight Ash, 3121




Barleycorn Oak, 3128




Devonshire Oak, 3129




Edwardian Oak, 3131



Dark Linear Wood, 3123




Wharf Side Ash, 3124




Hemingway Oak, 3126


STONE EFFECT




Polished Cement, 3132




Alloyed Cement, 3133



Downtown Cement, 3135



Suburban Cement, 3134



Cliffside Slate, 3136

Style	Luxury Commercial Vinyl
Material	Heterogenous PVC
Surface Treatment	PUR
Total Weight	8000gsm
Total Thickness	5mm
Wear Layer Thickness	0.7mm
Wood Effect Plank Size	17.78cm x 121.92cm
Stone Effect Plank Size	30.48cm x 60.96cm
Stone Effect Tile Size	60cm x 60cm
Wood Effect Planks Per Box	10 (2.17m ²)
Stone Effect Planks Per Box	8 (1.86m ²)
Stone Effect Tiles Per Box	6 (2.16m ²)
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) ≥6
Flammability BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for use with castor chairs
Dimensional Stability	<0.1%
Residual Indentation	0.05mm
Underfloor Heating	Suitable, maximum 27°C

67



ENTRANCE MATTING

PRIMARY

Frameworks	70
Treadloc 25	72
Entrack 50	74

SECONDARY

Workspace Entrance	76
Workspace Entrance Design	78

PRIMARY


FRAMEWORKS

Frameworks is a unique range of tough and durable aluminium entrance systems with a host of insert options.

How to choose your frameworks system:



Stage 1:

Select your height

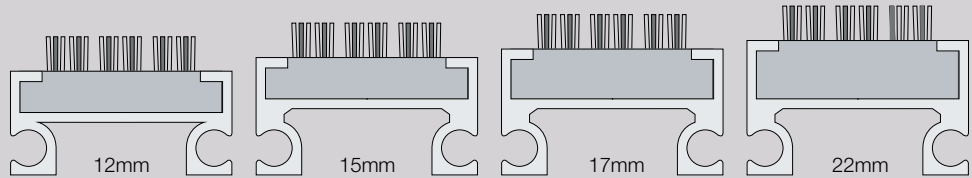

Stage 2:





Pick your construction




Open - collect dirt and moisture inside the mat/matwell rather than on the surface. Rollable for cleaning.
Closed - Dirt and moisture collected on the surface of the mat.

Stage 3:

Pick your insert from 13 options




Frameworks 12

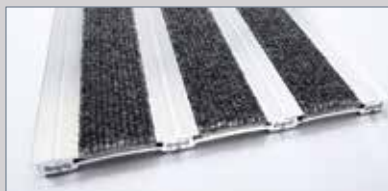


Frameworks 15C



Frameworks 17OP

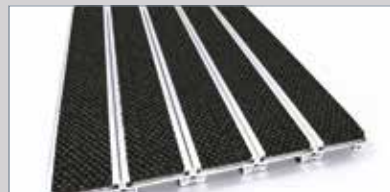

Frameworks 17C

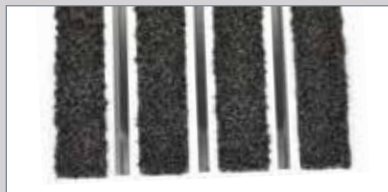


Frameworks 22OP



Frameworks 22C



Frameworks 17CS

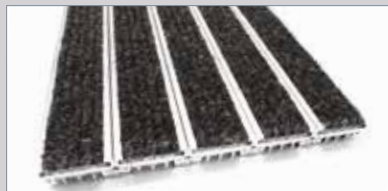

Frameworks 17HD

C = Closed
OP = Open
CS = Closed Scraper
HD = Heavy Duty
DR = Drainable



Available colourways:



MW Rib
Light Grey



MW Rib
Anthracite




MW Rib
Brown



MW Rib
Natural



MW Rib
Red



Workspace
Entrance Vulcan



Workspace
Entrance Victor



Workspace
Entrance Viscount



Workspace
Entrance Vixen



Premier
Dark Blue



Premier
Charcoal



Premier
Mercury



EXT Mat
Anthracite

MW Maxim New Range



Anthracite



Light Grey



Deep Blue



Natural

Accessories:



T-Bar



10mm-25mm Framing



MW Ramp System




PRIMARY TREADLOC 25

Treadloc 25 by Mat.Works is a revolutionary modular matting solution. Manufactured from nitrile rubber, the 25cm x 25cm tile may be small but packs an almighty punch when it comes to performance.


Specifically designed to withstand heavy footfall, Treadloc 25 will not expand, contract, fade or become brittle, nor will it bend or buckle under pressure making it an ideal heavy contract solution for entrance areas in every sector. Unlike aluminium solutions, Treadloc 25 can withstand slight undulations in the sub-floor, which are sometimes unavoidable, without compromising the strength and performance of the product.

Treadloc 25 tiles are easily interchangeable and designed with interlocking male and female components for ease of installation. The versatile tiles can be quarter-turned during installation to create a checkerboard effect allowing for multi-directional entrances. There is also the added benefit of being able to purchase individual Treadloc 25 tiles, meaning any damaged tiles can be replaced with ease.


INSERT OPTIONS



Workspace Entrance Victor




Workspace Entrance Vixen




Workspace Entrance Vulcan




Workspace Entrance Viscount




Premier Mercury



Premier Charcoal




Premier Dark Blue



MW Maxim Yellow and
MW Maxim Anthracite

MW Rib HD inserts now available



Anthracite



Light Grey



Deep Blue

Dimensions	25cm x 25cm
Locking Guides	Easy Inter-locking system as standard. Removable male and female connectors.
Composition	Nitrile rubber composition
Dry Rubbing	(BS1006:X12) 4 - 5
Wet Shampoo	(851006:UK-TB) 4 - 5
Performance	Nitrile Rubber is resistant to oil, grease & fuel.
Resistant to stable temperatures	40-180 C
Wear Classification	Heavy Contract Class 33
Product Weight	Diamond 12,300gsm Premier 13,500gsm
Flammability	BS EN 13501 - Cfl-s1
Twice the weight of leading competitor products - twice the durability	

Treadloc 25 provides a flammability rating of Cfl-s2 (BS EN 14041:2004)



Perfect for Healthcare

The nitrile rubber in Treadloc 25 is now manufactured with copper compounds, a material that has been proven to have anti-microbial properties, combating the spread of hospital-acquired infections, including MRSA.

The product has been tested to ISO 22196, which specifies a method of evaluating the antibacterial activity of antibacterial-treated plastics, and other non-porous surfaces of products.

The results showed that the copper in the Treadloc 25 killed 99.29% of MRSA Bacterium.




When examined under the Coefficient of Friction test (TRRL Pendulum test in accordance with BS 7976-2:200+A1:2013), Treadloc 25 has been proven to provide a low risk for slips in both dry and wet conditions.






PRIMARY
ENTRACK 50


INSERT OPTIONS




Workspace Entrance Vulcan




Workspace Entrance Victor




Workspace Entrance Viscount




Workspace Entrance Vixen




Premier Dark Blue




Premier Charcoal




Premier Mercury



MW Rib Anthracite




MW Rib Light Grey




EXT Mat Anthracite


Dimensions	50cm x 50cm
Insert Width	85mm
Connection	Integral 'lock down' fixing system
Colourway Options	10
Environmental options	Recyclable and reusable
Base	Non-pvc polymer base

With its click fit connections, Entrack 50 can be installed with ease.




Connect Entrack 50 together to create any size entrance mat required:



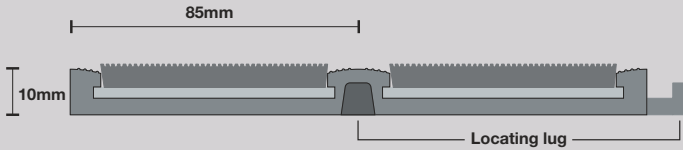

A flexible modular system made from TPE which won't expand, contract or fade in colour. An extremely versatile product, Entrack 50 carpet strips are interchangeable and are suitable for entrances with or without matwells.

- High specification low profile platform
- Easy to cut and shape to bespoke patterns
- Recyclable and reusable
- Won't tap, bounce or buckle under heavy footfall
- Easily cut and trimmed on site
- Made in Britain
- Suitable for external or internal areas




MADE IN BRITAIN


Tile colours representative in print, order a full tile for true likeness.




SECONDARY
WORKSPACE
ENTRANCE

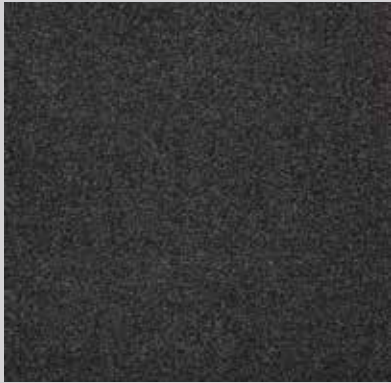


Vulcan
(LRV - 3.48)



Vixen
(LRV - 3.24)



Victor
(LRV - 4.87)




Viscount
(LRV - 2.69)

Style	1/10th Gauge
Yarn Construction	100% solution dyed nylon
Pile Yarn Weight	1,000gsm
Pile Height	5mm +/- 0.5mm
Total Weight	Tile 4,800 gsm / Sheet 1,800 gsm
Pile Density	114,260 tufts per square metre
Total Thickness	Tile 9mm / Sheet 8mm
Backing	Bitumen Compound / Eco-Bac / Unitary Bac
Dimensions	50cm x 50cm tile / 2m x 20m
Wear Classification	Heavy Contract Class 33
Colour Fastness	To Water - 5 To Light - 5 To Rubbing - 4.5
Flammability	BS 4790 - Low Radius of Char BS EN 13501 - Cfl-s1
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004

TOTAL COLOURWAY OPTIONS - 4

- All products conform to BS8300
- Low LRV values compared to aluminium, LVL and fibrebonded products ensuring a positive point difference is easy to achieve for areas where partially sighted traffic will be important to consider
- Equalities Act 2010 compliant
- Entrance matting resistant to point loading and scuffing from rubber wheels and walking aids

AVAILABLE
FROM STOCK



MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.



SECONDARY
WORKSPACE
ENTRANCE DESIGN




Design 2 / Viscount

DESIGN 1




Victor

DESIGN 2




Victor


DESIGN 3




Victor



Viscount




Viscount




Viscount




Vixen




Vixen




Vixen



Vulcan



Vulcan



Vulcan

3 DESIGNS - 4 COLOURWAYS

Style	1/10th Gauge
Fibre Construction	100% solution dyed nylon
Pile Yarn Weight	1,000gsm
Pile Height	5mm +/- 0.5mm
Pile Density	114,260 tufts per square metre
Total Weight	Tile 4,800 gsm / Sheet 1,800 gsm
Total Thickness	Tile 9mm / Sheet 8mm
Backing	Bitumen Compound / Eco-Bac / Unitary Bac
Dimensions	50cm x 50cm tile / 2m x 20m
Wear Classification	Heavy Contract Class 33
Colour Fastness	To Light (ISO 105 - B02) 5 To Water (ISO 105 - E01) 5 To Rubbing (ISO 105 - X12) 4.5
Flammability	BS 4790 - Low Radius of Char BS EN 13501 - Cfl-s1
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004

DESCRIPTION

- Tough heavy contract, secondary entrance matting
- All products conform to BS8300
- Low LRV Values compared to aluminium, LVL and fibrebonded products ensuring a positive point difference is easy to achieve for areas where partially sighted traffic will be important to consider.
- Equalities Act 2010 compliant
- Entrance matting resistant to point loading and scuffing from rubber wheels and walking aids

FLAME PROPERTIES

- Cfl-s1 for tiles

COLOURS

3 Designs - 4 Colourways
12 options

Tile colours representative in print, order a full tile for true likeness.

INTRODUCING

paragon

CARPET TILES

Discover more about Paragon Carpet Tiles, one of the
UK's leading design-led carpet tile manufacturers.



OUR FUTURE OUR HISTORY

COMMITTED TO UK MANUFACTURING

PARAGON CARPET TILES

Paragon Carpet Tiles is part of National Floorcoverings, a group that is committed to UK manufacturing and producing quality products for its customers.

The Group has expertise in all areas of flooring, from manufacturing entrance matting, fibre bonded carpets, tufted carpet and tiles to specialised indoor and outdoor sports surfaces.





Environment

The Environmental culture at Paragon Carpet Tiles is '**reduce, recycle, reuse**', using raw materials from sustainable sources/with recycled content wherever possible. Employees are actively involved in setting and monitoring the achievement of environmental objectives and targets.

Air emissions from the production process are independently monitored for their environmental impact. Analysis has confirmed that emissions are less than 1% of Government targets.

Manufacturing activity and its impact on the environment are regularly audited by environmental health officers and have been confirmed as 'low risk', with a rating of 5 out of 175.

British Standards regularly audit the Environmental and Quality Management Systems to ensure continued compliance to accredited standards and to demonstrate continuous improvement.





UP TO **80%**
OF OUR PRODUCTS
ARE MADE USING
RECYCLED MATERIAL



PARAGON
CARPET TILES
OPERATES A ZERO
LANDFILL POLICY



ISO 14001
Environmental
Management System



breglobal
Environmentally
Profiled products



ISO 9001
Quality Management
System



Manufacturing

Raw materials are used wherever possible from sustainable sources and with recycled / reclaimed content. Currently, standard manufacture includes:

Bitumen backing contains at least 75% of recycled product

Latex pre-coat backing contains at least 75% of recycled product

Up to 80% of the total product is made using recycled materials

Pile yarns contain up to 100% recycled content

Pallets obtained from sustainable sources

Tile boxes are 100% recycled cardboard

Production processes are not water dependent – 95% of water consumption is for recreational facilities



CLEANING & MAINTENANCE GUIDE

To maximise the carpet’s aesthetic appeal, performance and life expectancy, it is imperative to ensure at the specification stage that:

- 1. Carpets will be protected from other site activities during installation and thereafter.
- 2. Clients understand the enclosed information and that they accept responsibility for correct carpet care.
- 3. Carpets are protected from excess soiling or moisture in entrance areas, by use of an effective barrier material such as those from the MatWorks range

GENERAL CLEANING

Daily vacuuming with a twin motored upright vacuum cleaner, preferably with an adjustable head, is recommended. It is essential to remove all loose soil daily because if left to build up, the particles of dirt are much harder to remove and are more damaging to the fibre structure, thereby decreasing the life of the carpet.

Attention should be given to areas where there is extra traffic and in entrances to buildings where extra vacuuming is necessary.

Depending on the level of installation trafficking, the carpet should be periodically deep cleaned using high performance hot water extraction equipment.

Rotary brush cleaning not recommended.

A reputable contract cleaner should be used, preferably NCCA registered (for NCCA details visit www.ncca.co.uk). It is important that the carpet is deep cleaned at least once a year.

STAIN REMOVAL

It is essential to deal with spillages immediately and any subsequent stains as appropriate.

In the event of a spillage, immediately blot with a clean absorbent cloth until there is no further transfer from the carpet to the cloth. If any further stain remains or has otherwise been allowed to dry, the method will vary accordingly.

It is recognised that particularly for contract situations, if stains are not dealt with immediately, cleaning staff may not be in a position to identify the type of stain. A good quality, multipurpose stain remover is therefore very useful, although it must be understood that this will not successfully tackle all types of stains, and wherever possible the chart recommendations should be strictly followed.

Also any stains left over a period of time become increasingly more difficult to remove and may require several treatments.

In all cases, after stain removal, the carpet should be allowed to dry completely and then cleaned with a twin motored upright vacuum cleaner.

Solvent cleaning of bitumen backed tiles should preferably be avoided. Where this is not possible, extra caution should be taken and only very light surface cleaning should take place.

If any of the treatments listed are not successful, seek professional help.

The methods are recommended in good faith; however, we cannot accept responsibility for their use in any specific case.

CLEANING GUIDE

Stain Type	Stain Removal Procedure
Tea / Coffee Food Fountain Pen Ink Water Based Paint	A liquid detergent solution such as Granwax Ezee Spot & Stain Remover. Apply the solution to the stained area. Lightly agitate affected areas & remove by use of absorbent cloth. Stubborn stains may require a second application.
Chewing Gum	Apply chewing gum remover then break-up and remove pieces or pierce gum with fork or Prochem Perforator Block then apply Citrus Gel or Solvall Spotter and leave for a few minutes. Remove softened gum with spatula or blunt knife. For large areas apply Bazooka Gum Remover in conjunction with Bazooka Gum Removal Machine.
Grease	Scrape up excess, hardened residue prior to wetting. Apply Solvex or Solvall Spotter and blot. Apply Citrus Gel and blot. Apply Stain Pro and blot. For larger areas apply Power Burst then rinse extract thoroughly.
Ink (solvent soluble)	Apply Solvex and blot – do not rub. Repeat as needed. If stain persists, apply Citrus Gel. Rinse thoroughly with water and blot until dry. Note: All inks are not the same and different approaches may have to be evaluated.
Milk	Apply Stain Pro and blot. Apply Fibre & Fabric Rinse solution and blot until dry. If stain persists apply Solvex or Citrus Gel and blot. Apply Neutral Pro-Spotter and blot. Rinse thoroughly with water and blot until dry.
Oils	Apply Solvall Spotter and blot or apply Citrus Gel and blot or apply Solvex and blot until dry. Where a solvent cannot be used apply Power Burst solution, brush and rinse with Fibre & Fabric Rinse solution.
Oil Based Paint / Varnish	Apply Solvall Spotter and blot or apply Citrus Gel and blot or apply Solvex and blot. Re-apply Solvex until as much paint as possible is removed then weight down the stain with towels for several hours to loosen. Apply Neutral Pro-Spotter, work into stain then blot. Rinse thoroughly with water and blot until dry.
Shoe Polish	Apply Solvex or Sovall Spotter & blot. Apply Citrus Gel & blot. Rinse thoroughly with water & blot until dry
Tar & Asphalt	Scrape off as much as possible with blunt knife. Apply Solvall Spotter or Solvex and blot. Apply Citrus Gel and blot. Apply Neutral Pro-Spotter and blot then rinse thoroughly with water and blot until dry.

Health and Safety
Please ensure that for all above referenced items, the manufacturers’ use & safety instructions are adhered to.

Granwax Ezee Spot & Stain Remover can be obtained from Granwax Products Ltd; Telephone 01773 541177
Other products listed can be obtained from Prochem Europe Ltd; Telephone 020 8974 1515

EXPERIENCE CARPET TILES



Farfield Park, Manvers, Wath-upon-Deane, Rotherham, S63 5DB
T. +44 (0) 1709 763 839 F. +44 (0) 1709 763 813 E. sales@paragon-carpets.co.uk
www.paragon-carpets.co.uk

Samples Department E. samples@paragon-carpets.co.uk T. +44 (0)1709 763 805

SHOWROOM: London Design Studio
111 Charterhouse St / London / EC1M 6AW